


Rent a tankless water heater from Kitchener Utilities

and save energy, money and space!

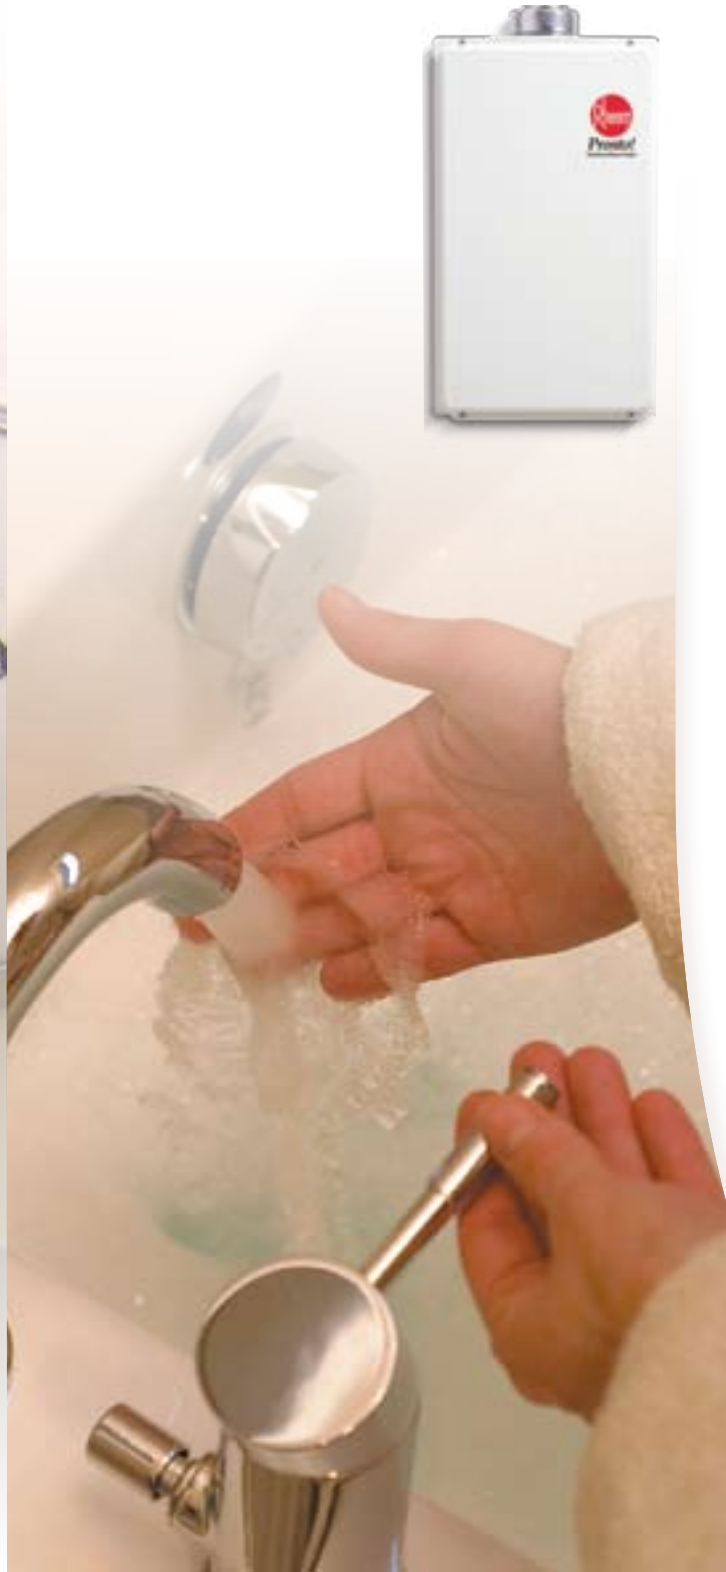

According to Natural Resources Canada, water heating accounts for about 20% of your home's total energy costs. When you rent a natural gas tankless water heater from Kitchener Utilities, you can save up to 25%* on your natural gas usage for hot water heating with the increased energy efficiency. That means savings on your natural gas consumption for water heating.

Smaller. Greener. More efficient.

Tankless water heaters heat your water on demand, so you never run out of hot water. They're energy efficient, so you only pay to heat the hot water you use – because there is no wasted energy to continually heat the water in a storage tank. Tankless water heaters use up to 25%* less natural gas than conventional water heaters, so you save energy – and money – using the same amount of hot water. They are also much smaller and compact, requiring much less space.

*If you don't increase your hot water consumption and you are currently using a conventional natural gas water heater.

Replace your water heater with a tankless heater and you could qualify for rebates.

Rheem tankless water heaters, offered by Kitchener Utilities, are ENERGY STAR® qualified. When you rent a Rheem natural gas tankless water heater from Kitchener Utilities, you'll qualify for a **\$200 on-bill credit** to your account. Plus, the rates on tankless rental water heaters were reduced effective November 1, 2009 to make the switch to tankless water heating even more economical!

You may also qualify for rebates through the Ontario Home Energy Savings program. You must have an ecoENERGY home evaluation first, along with a follow-up evaluation.

Kitchener Utilities natural gas tankless water heaters monthly rental rates.

| | |
|--|-----------------|
| TANKLESS RTG-53DVN Suitable for 1 bathroom homes | \$28.00* |
| TANKLESS RTG-66DVN Suitable for 2 bathroom homes | \$29.50* |

*plus 13% HST

Please Note – Program conditions and excess installation charges may apply. Current Kitchener Utilities rental water heater customers may incur replacement charges to switch to a tankless water heater. To qualify for this program, you must be a registered owner of a residential property in Kitchener using an operating salted water softener in your home. Kitchener Utilities \$200 natural gas tankless water heater on-bill credit is available for installations after August 31, 2009 only. New home construction does not qualify for rebate.

Rent your natural gas tankless water heater from Kitchener Utilities.

When you rent from Kitchener Utilities, you'll get peace of mind from knowing we're always there if you ever have a problem with your water heater. If you're thinking about going tankless, give us a call at **519-741-2626** and press "0" for more information. Or visit us on the Web at www.kitchenerutilities.ca



The ENERGY STAR name and symbol are administered and promoted in Canada by Natural Resources Canada.



CONDENSING TANKLESS SERIES

Continuous hot water for 3 bathroom homes*

**CRTGH-95DV indoor direct vent natural and LP models –
11,000 - 199,900 BTU max.**

9.5 gal./min at 35° F rise max., 8.4 gal./min. at 45° F rise

Limited Warranty:

12-Year on heat exchanger, 5-Year on parts, 1-Year on labour

See Residential Warranty Information Brochure for complete warranty information.

- 94% efficient with stainless steel condensing heat exchanger
- 2-Pipe Direct Vent System designed for ULC-S636 PVC or CPVC Pipe. See instructions for details.
- Up to 35 equivalent ft. of 3" Pipe or 5 equivalent ft. of 2" Pipe, ULC-S636 PVC or CPVC required. See instructions for details.
- **Industry Best!** .26 GPM Minimum Flow Rate, .40 GPM Minimum Activation Flow Rate
- Digital (UMC-117) remote control and 10 ft. of thermostat wire included
- EZ-Link™ cable available for high demand applications to connect two tankless units to operate as one
- Manifold up to 6 units with an optional MIC-6 manifold control board
- Manifold up to 20 units with the optional MIC-185 plus the MICS-185 manifold control assembly
- High-altitude capability – up to 9,840 ft. elevation above sea level (no chip required)
- **Exclusive!** Guardian™ overheat film wrap (OFW)
- All Rheem tankless models are third-party efficiency listed by GAMA/AHRI
- Continuous hot water, energy saving and compact, space saving design
- Intelligent electronic controls designed to increase energy efficiency and safety
- Self Diagnostic System
- Digital display shows temperature setting and maintenance codes
- Built-in electric blower
- Supplied with a 120 volt power cord
- Environmentally friendly Low NOx burner meets SCAQMD rule 1146 requirements
- Freeze protection to -35° F+

Product appearance may differ.

* Based on simultaneous showers using 2.5 gallons per minute. Flow rates vary depending on temperature of cold water supply.

The Condensing Series Tankless models can be converted for Commercial Installations



*Digital remote control included.



Tankless water heaters
Continuous hot water



relax
It's Rheem®

See reverse for specifications.


RHEEM CONDENSING TANKLESS SERIES

Specifications

| DESCRIPTION | | | FEATURES | | | | | ROUGHING IN DIMENSIONS (SHOWN IN INCHES) | | | | | | ENERGY INFO. | | | |
|---|-------------------|--------------------|----------------|---------------------------|---------------------|---------------------|----------|--|-----|--------|--------|-------|---------------|---------------------|---------------|------------------------|---------------------|
| MODEL NUMBER | GAS INPUT BTU/HR. | TYPE | TEMP. RANGE | MIN. FLOW /ACTIVATION GPM | GPM @ 77° RISE MAX. | GPM @ 45° RISE MAX. | MAX. GPM | CONNECTION | | HEIGHT | WIDTH | DEPTH | VENT DIAMETER | SHIP. WEIGHT (LBS.) | ENERGY FACTOR | % OF THERM. EFFICIENCY | OPERATING COST NAT. |
| | | | | | | | | WATER | GAS | | | | | | | | |
| RHEEM TANKLESS WATER HEATER FOR 3 BATHROOM HOMES | | | | | | | | | | | | | | | | | |
| CRTGH-95DVN* | 11,000-199,900 | Indoor Direct Vent | 85° to 140° F* | .26/.40 | 4.9 | 8.4 | 9.5 | 3/4 | 3/4 | 27-1/2 | 18-1/2 | 9-3/4 | 2 3/4" | 82 | .94 | 94% | \$194 |

*Model is available in Natural Gas and Propane (LP). For Propane replace the N with P when ordering.

• Factory set maximum temperature is 120° F. See Use and Care Manual for setting.

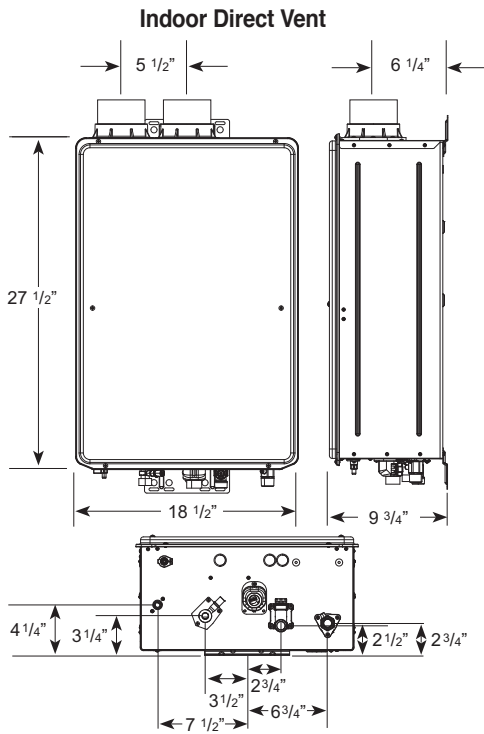

Venting Options

1. ULC-S636 PVC & CPVC
2. ULC-S636 Concentric Vent
3. Standard Snorkel
4. Pancake Termination

Please refer to Use and Care Manual for further detail.




PENDING

Proper gas pressure must be ensured to supply tankless gas water heaters – up to 199,900 BTU for CRTGH-95 models. (Consult your gas supplier)

| Model Number | Temperature Rise (° F) | | | | | | | | |
|---------------------------|------------------------|-----|-----|-----|-----|-----|-----|-----|------|
| | 35° | 45° | 50° | 60° | 70° | 77° | 80° | 90° | 100° |
| CRTGH-95 Water Flow (GPM) | 9.5 | 8.4 | 7.6 | 6.3 | 5.4 | 4.9 | 4.7 | 4.2 | 3.8 |

Above estimates are for sizing purposes only.

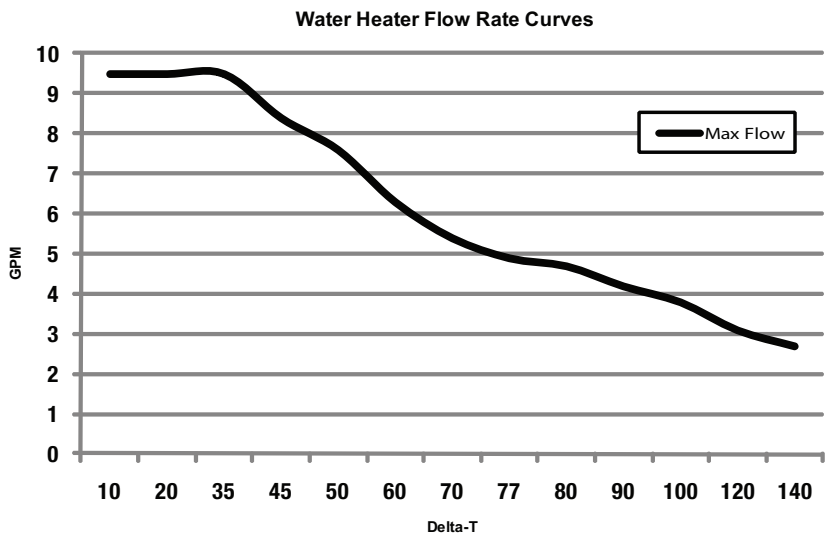

*COMMERCIAL OPERATION AVAILABLE WITH CONVERSION KITS:

- RTG20224A FOR CRTGH-95DVN
- RTG20224B FOR CRTGH-95DVP

Temperature range for commercial: 85° to 185° F.

The commercial conversion kits consist of a chip and programming instructions.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating and Heating & Cooling Products
101 Bell Road • Montgomery, AL 36117-4305
1-866-720-2076 • www.rheem.com

Rheem Canada Ltd./Ltée • Water Heater Division
125 Edgeware Road, Unit 1, Brampton, Ontario L6Y 0P5